

Vacvator



METRO 6

METRO 6-76 NDD-JET


Built for Urban Productivity

Operating System		
CAN bus	Interactive colour touch screen	
Spoil Tank		
Litre Capacity	7600L	
Spoil Door	Fully opening	
Door Operation	Hydraulic	
Door Lock	Six point hydraulic wedge locking mechanism	
Tipping	Telescopic hoist with safety valve	
Water Tank		
Clean Water Tank Capacity	Integrated	3000L
Clean Water Fill Type	Backflow protected Connection at ground level	50mm (2") camlock
Vacuum System		
Power Supply	Full engine horsepower via split shaft unit gear box	320Hp
Blower	Jurop Helix 750 Roots type rotary lobe, air injection	4162m ³ /h (2450cfm)
Filtration		
4 Stage Filtration System	Spoil tank, 3 barrel cyclone, 12 poly washable filters & blower pre-filter	
Suction Boom		
3 Function	Hydraulic 270° slew, boom up/down, boom stick in/out	5m reach
Travis Coupling	150mm (6")	
Spoil Connection Points		
Spoil Tank Inlet	Travis with knife valve	150mm (6")
Spoil Tank Dewatering Drain	Travis with knife valve	150mm (6")
Boom Inlet	Travis	150mm (6")
NDD - High Pressure Water		
Pump	Comet TW8036S	1*
Pressure	248 Bar (3600psi)	
Flow	32LPM	
Hose Size	10mm (3/8")	
Hose Length	20m *	
High Pressure Lance with Turbo Nozzle	1x 1500mm & 1x 2000mm	
<i>High pressure Udor option available - 400 Bar (5800psi)</i>		

Jetter Drain Cleaner		
Triplex Water Pump	Udor HXR1-C 250 160R	245LPM 151 Bar (2200psi)
Jetting Reel	Vacvator	180m of 1" Jetting hose
Jetting Heads	ENZ Kit 1" BSP	
Remote Control	Pump on/off, reel in/out, water flow and pressure, hose length out	
Remote		
Autec DJM Dynamic+	Proportional control joystick, toggle switch, rocker levers, e-stop, rechargeable batteries	
Safety Equipment		
CAN bus Control System	Integrated safety shut down protection scales, E-stops, high water pressure, hydraulic oil temp, low transmission oil pressure, Hino engine protection	
Emergency Stops	Control panel, Remote & LHS rear	3
Fire Extinguisher	Dry chemical ABE	4.5kg
Spoil Tank Safety Prop	Yes	
Spoil Door Safety Prop	Yes	
Safety Handrail & Maintenance Walkway	Pneumatically operated	Yes
Safety Harness Attachment Point	Yes	
Beacons	Front & Rear	Yes
Work Lights	Rear of cab, end of boom & rear of tank	Yes
UHF 80 Channel	Yes	
Storage		
Blower Frame Toolbox	Vertical three shelf	.90m x .76m x .50m (315L)
Underbody Toolbox	.80m (250L)	
Hose Trays	Left & right hand side	2.4m x .50m (480L)
Lockable Hose Tray (option)	Left & right hand side	2.4m x .50m (480L)
Vacuum Hose Reel	Vacvator - rear mounted, variable speed remote operated in/out	20m of 100mm (4") hose
Truck		
Hino 700 FS 2632 6x4	Allison automatic transmission, airbag suspension	



* Option of two

Unit Dimensions

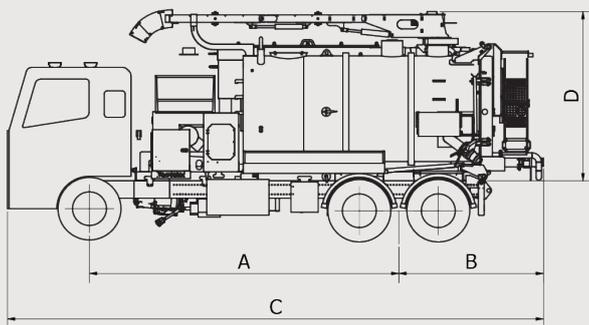

Boom Reach

- Minimum reach
- Maximum reach

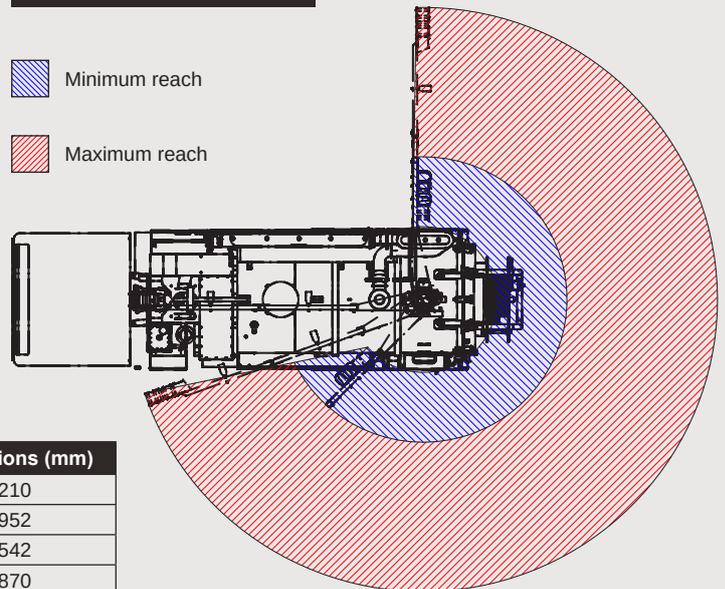

Description	Code	Dimensions (mm)
Wheelbase	A	5210
Rear Overhang	B	2952
Overall Length	C	9542
Unit Height	D	2870
Overall Height	E	3940
Overall Height - No Boom	F	3480
Overall Width	G	2490